


Sauerburger

Forging Ahead

NOTES:			

SIMON RICHARD LTD

Crown Tailrig • Bonchester Bridge • Hawick • TD9 8RA
Tel: 01450 860774 • Fax: 01450 860772
E-mail: simon@simon-richard.co.uk
www.simon-richard.co.uk

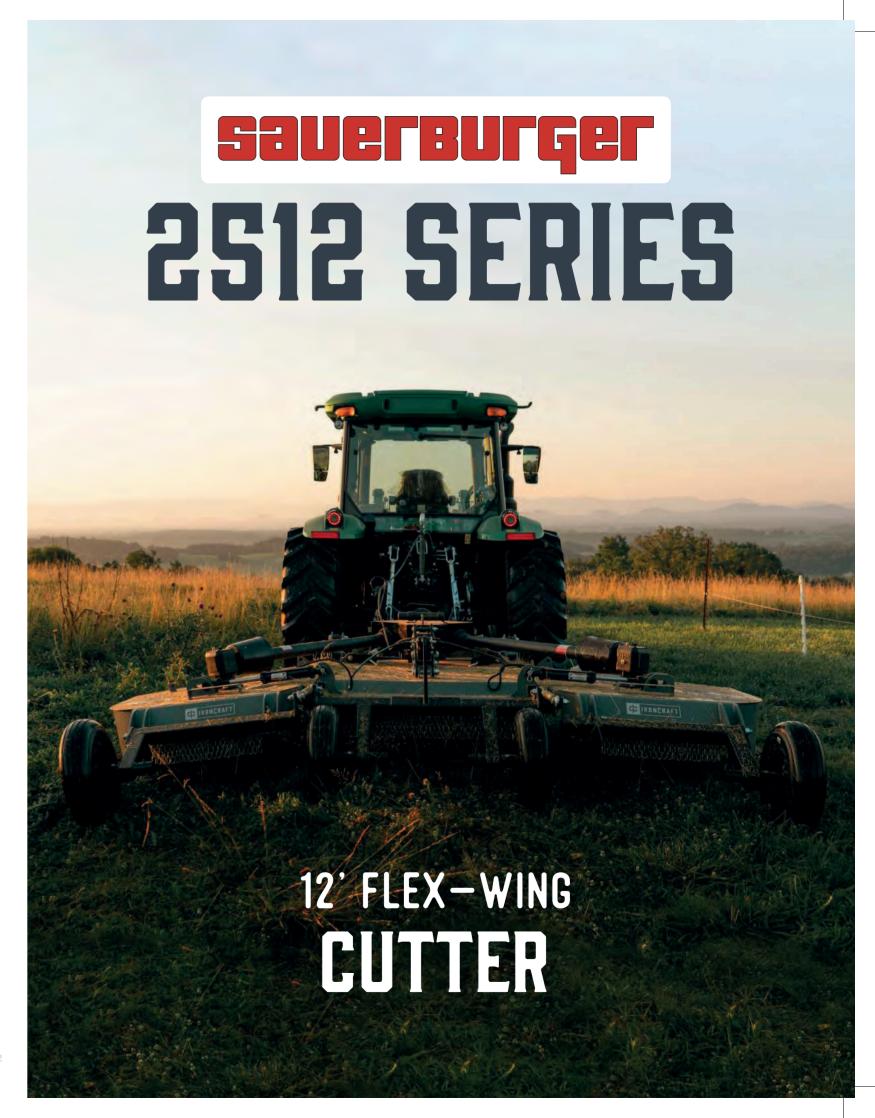

2512 SERIES 12' FLEX-WING CUTTER

Made in the U.S.A. WITH U.S. & IMPORTED PARTS

PRODUCT HIGHLIGHTS


RECOMMENDED FOR 35 PTO HORSEPOWER MINIMUM TRACTORS

190 HP OUTBOARD GEARBOX RATING & 5 YEAR LIMITED WARRANTY

2-1/2" MATERIAL CUT CAPACITY

22° DOWN TO 87° UP WING FLEX



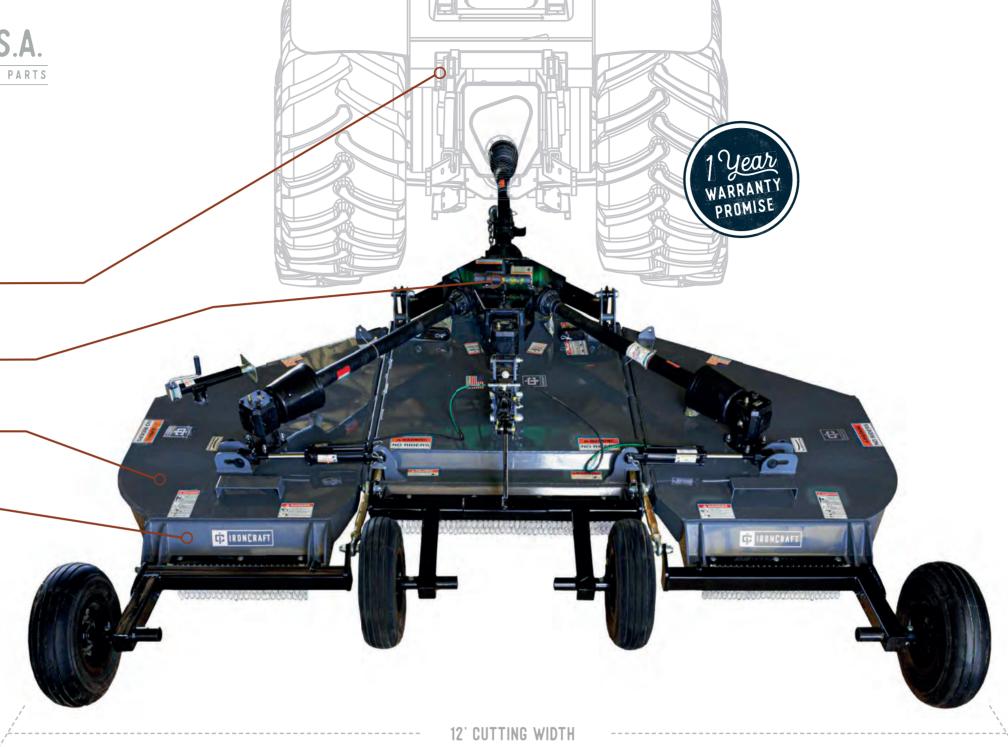

IRONGRAFT

(423) 405-5150

IRONCRAFTUSA.COM



	2512
PTO HORSEPOWER	"35 PTO HP MINIMUM (GEAR DRIVE TRANSMISSION)"
CUTTING WIDTH	144"
OVERALL WIDTH	151"
OVERALL LENGTH W/WHEEL	158"
TRANSPORT WIDTH	89-3/4"
TRANSPORT HEIGHT	68"
CUTTING CAPACITY	UP TO 2"
CUTTING HEIGHT	1-1/2" TO 12"
APPROX. WEIGHT	2,630 LBS W/4-20" vLAMINATED TIRES
APPROX. TONGUE Weight	759 LBS
BLADE TIP SPEED	15,657 FPM
BLADES	1/2" X 3" W/ LIFT
OUTBOARD GEARBOXES	75 HP
SPLITTER GEARBOX	175 HP
GEARBOX RPM	540 RPM
GEARBOX OIL	85W-140 (FACTORY FILLED)
OUTPUT SHAFT DIAMETER	2"
INPUT PTO	ASAE CAT 5 CV
WING DRIVE PTO	ASAE CAT 4 W/ SLIP CLUTCH

HITCH	SWIVEL CLEVIS		
DECK THICKNESS	10 GA		
SIDE SKIRT MATERIAL	3/16"		
HEIGHT Adjustment	HYD. CYLINDER		
WING Adjustments	TURNBUCKLE		
SUSPENSION	SINGLE SPRING		
WING FLEX	22 DEGREES DOWN TO 87 DEGREES UP		
WING FREE FLOAT	22 DEGREES DOWN TO 45 DEGREES UP		
WING CYLINDERS	SINGLE ACTING STD		
SKID SHOES (STANDARD)	STD & REPLACEABLE		
SAFETY Deflectors	SINGLE ROW STANDARD		
TOW CHAINS	STANDARD		
BLADE OVERLAP	6"		
BLADE CARRIER	3/16" FORMED PLATE W/ 1" X 6" BARv		
WHEELS & TIRES	4-20" laminated Std (4-20" aircraft optional)		
GEARBOX WARRANTY	5 YEAR LIMITED		