

Sauerburger

Forging Ahead

NOTES:			

SIMON RICHARD LTD

Crown Tailrig • Bonchester Bridge • Hawick • TD9 8RA
Tel: 01450 860774 • Fax: 01450 860772
E-mail: simon@simon-richard.co.uk
www.simon-richard.co.uk





2515 SERIES 15' FLEX-WING CUTTER



PRODUCT HIGHLIGHTS

- RECOMMENDED FOR 50 PTO HORSEPOWER MINIMUM TRACTORS
- 190 HP OUTBOARD GEARBOX RATING & 5 YEAR LIMITED WARRANTY
- 2-1/2" MATERIAL CUT CAPACITY
- 22° DOWN TO 88° UP WING FLEX

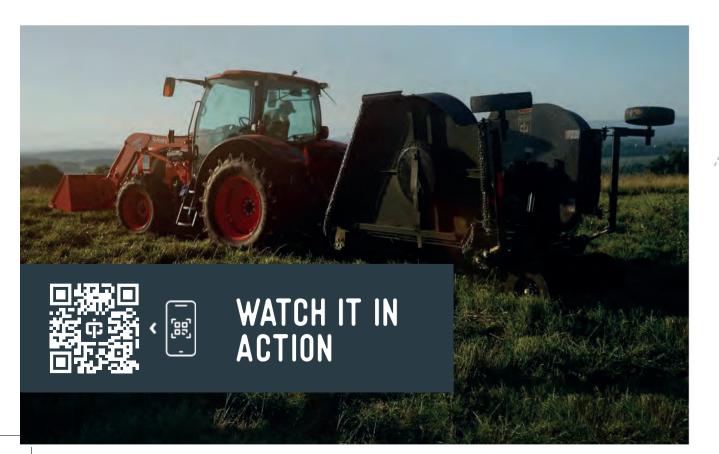

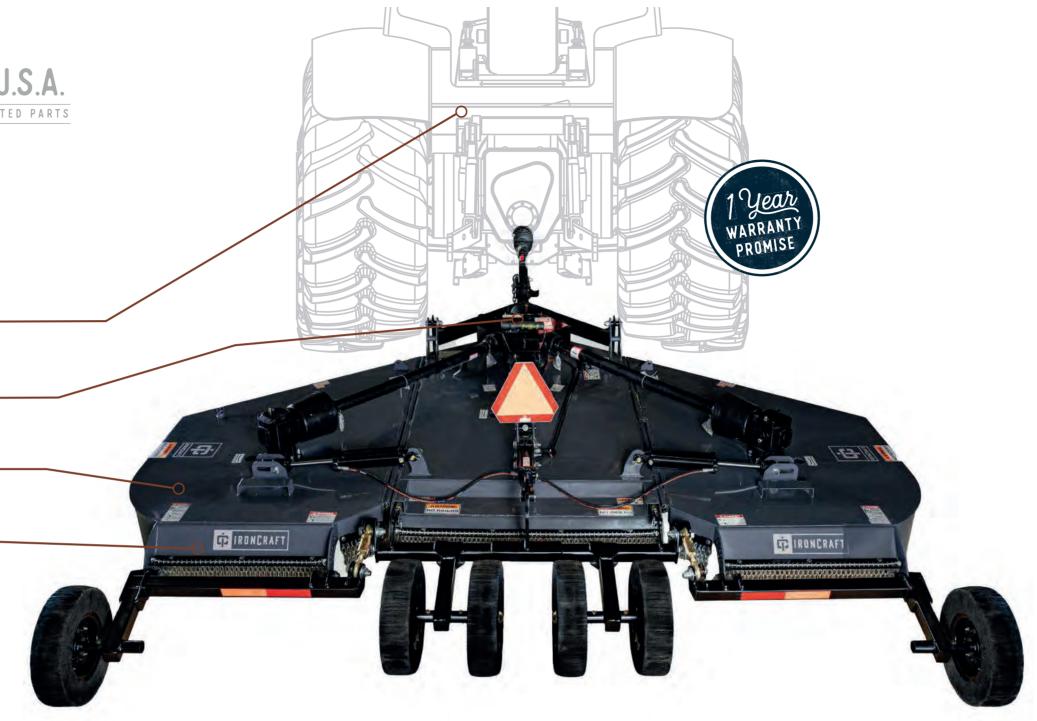


CULTING WIDTH

IRONGRAFT

(423) 405-5150

IRONCRAFTUSA.COM

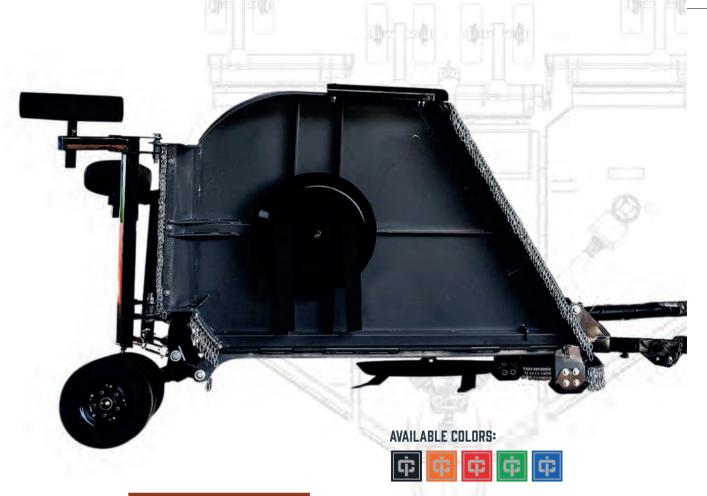

	2515		
PTO HORSEPOWER	50 PTO HP MINIMUM		
CUTTING WIDTH	180"		
OVERALL WIDTH	188"		
OVERALL LENGTH W/WHEEL	186"		
RANSPORT WIDTH	90"		
ANSPORT HEIGHT	83" - 87"		
UTTING CAPACITY	UP TO 2-1/2"		
CUTTING HEIGHT	2" TO 15"		
APPROXIMATE WEIGHT	4500 LBS W/6-26" LAMINATED TIRES		
APPROXIMATE TONGUE WEIGHT	1500 LBS		
BLADE TIP SPEED	17,135 FPM (540 OR 1000 RPM)		
BLADES	1/2" X 4" UPLIFT		
OUTBOARD GEARBOXES	190 HP		
PLITTER GEARBOX	235 HP		
GEARBOX RPM	540 OR 1000 RPM		
GEARBOX OIL	85W-140 (FACTORY FILLED)		
OUTPUT SHAFT DIAMETER	2"		
INPUT PTO	ASAE CAT 6 CV		
WING DRIVE PTO	ASAE CAT 4 W/ SLIP CLUTCH		
HITCH	SWIVEL PIVOT LEVELING		

DECK THICKNESS	10 GA	
SIDE SKIRT MATERIAL	1/4" X 13-1/2"	
HEIGHT Adjustment	HYD. CYLINDER	
WING ADJUSTMENTS	HEAVY DUTY TURNBUCKLE	
SUSPENSION	1 HEAVY DUTY SPRING	
WING FLEX	22 DEGREES DOWN TO 88 DEGREES UP	
WING FREE FLOAT	22 DEGREES DOWN TO 45 DEGREES UP	
WING CYLINDERS	SINGLE ACTING STD	
SKID SHOES (STANDARD)	REPLACEABLE	
SAFETY Deflectors	SINGLE ROW STANDARD	
TOW CHAINS	STANDARD	
BLADE OVERLAP	6"	
BLADE CARRIER	ROUND PAN	
WHEELS & TIRES	4-20" laminated std (optional 4 or 6 tires in 26" laminated, 29" aircraft or 26" foam filled)	
DECK RINGS	N/A	
LED LIGHT KIT	OPTIONAL	
GEARBOX WARRANTY	5 YEAR LIMITED	